


## 2. Product data

### 2.1 Product name

GRUNDFOS dosing pumps, types DME, DMS and DMM.

Note that the type key cannot be used as product configuration tool, as all combinations are not possible.

#### 2.1.1 Type designation

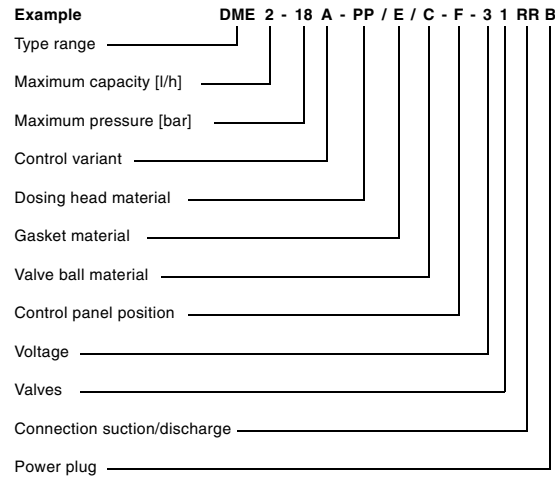

#### 2.1.2 Type key

##### Example

##### Control variant

- A Standard
- AR Standard + alarm relay
- AP Standard + Profibus
- AG Standard + GENIbus
- B Basic

##### Dosing head material

- PP Polypropylene
- PV PVDF
- SS Stainless steel

##### Gasket material

- E EPDM
- V FKM

##### Valve ball material

- C Ceramic
- SS Stainless steel 316 AISI

##### Control panel position

- F Front-fitted
- S Side-fitted
- X No control panel

##### Supply voltage

- 6 1 x 230 V, 60 Hz
- 2 1 x 120 V, 60 Hz
- 3 1 x 100-240 V, 50-60 Hz
- 5 3 x 230/460 V, 60 Hz

##### Valves

- 1 Standard valve
- 2 Spring-loaded valve


##### Connection suction-discharge

- T Tubing 0.125"/0.25"
- R Tubing 0.25"/0.375"
- S Tubing 0.375"/0.5"
- V Threaded NPT 1/4\*\*
- Y Threaded NPT 3/8\*\*
- X Threaded NPT 1/2\*\*
- Z Threaded NPT 1\*\*

##### Mains plug

- B USA, Canada 120 V
- X Power plug

A - PP / E / C - F - 1 1 1 G F

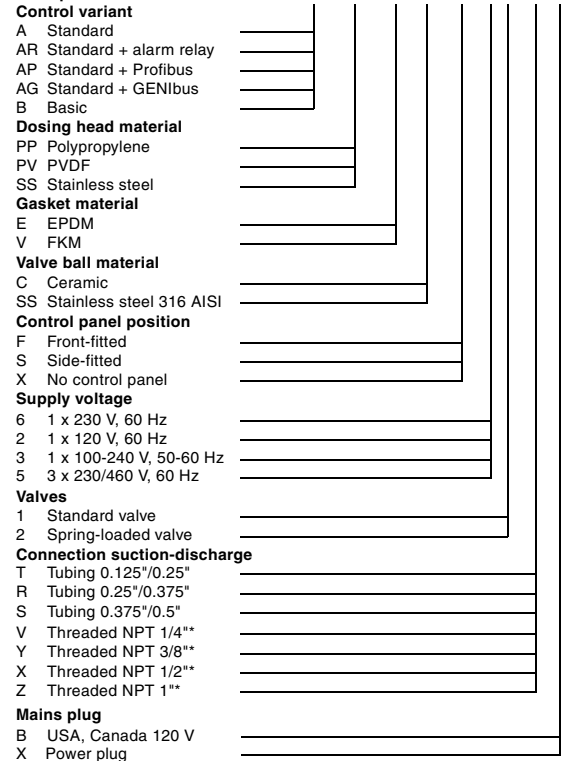

\* On DMS/DME, on stainless steel pumps only.